





SHANGHAI JIANGYANG WOOD
PRODUCTS CO., LTD
Add: No.8169, Puwei Road, Fengxian,
Shanghai, CHINA
Tel: 0086 21 6439 2047
Email: inquiry@cncustomdoor.com
www.cncustomdoor.com

About Us


The JIANGYANG WOOD is specializing in R&D and producing in all kinds of wood doors, especially good at OEM. The history of making wooden doors can trace back to 1980s, some workers are working in JYW for more than 25 years. Our 90% doors are exporting to Japan. All the raw materials are FSC certificated. Before making process, all the raw wood will be drying and reaching stable status. The key part of plant is the painting workshop. We're using vacuum sanding dust, spray water screen filtration equipment. Our products are meeting the Japanese Standard(F★★★★) and Germany Standard (DIN).

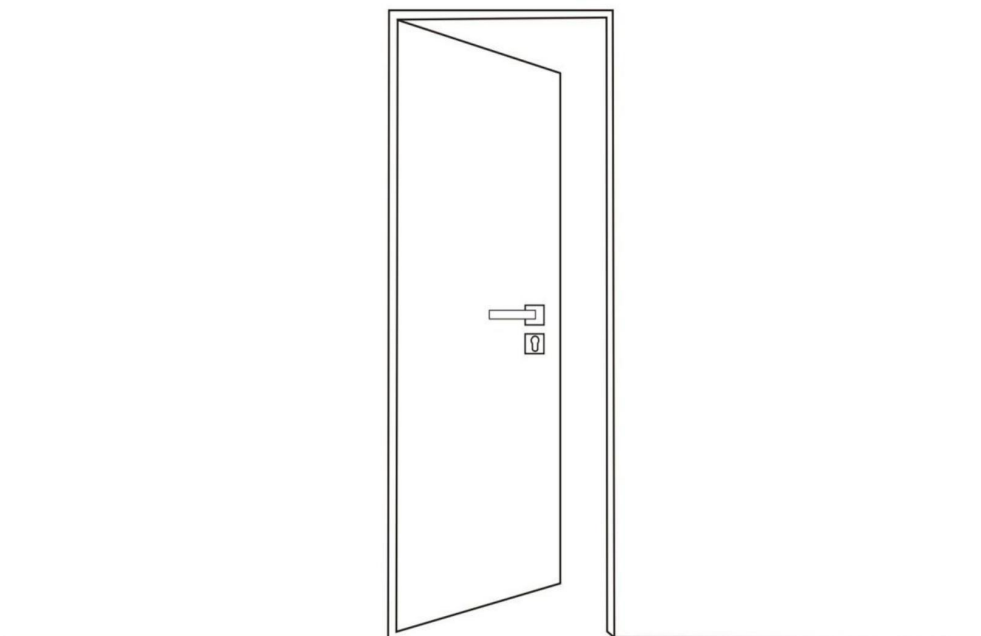

Facility

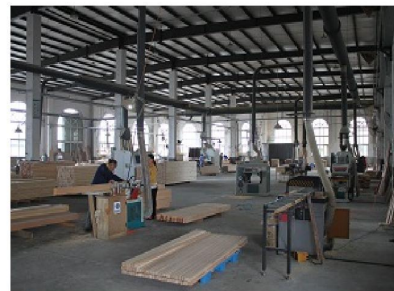

Flat Panel Door

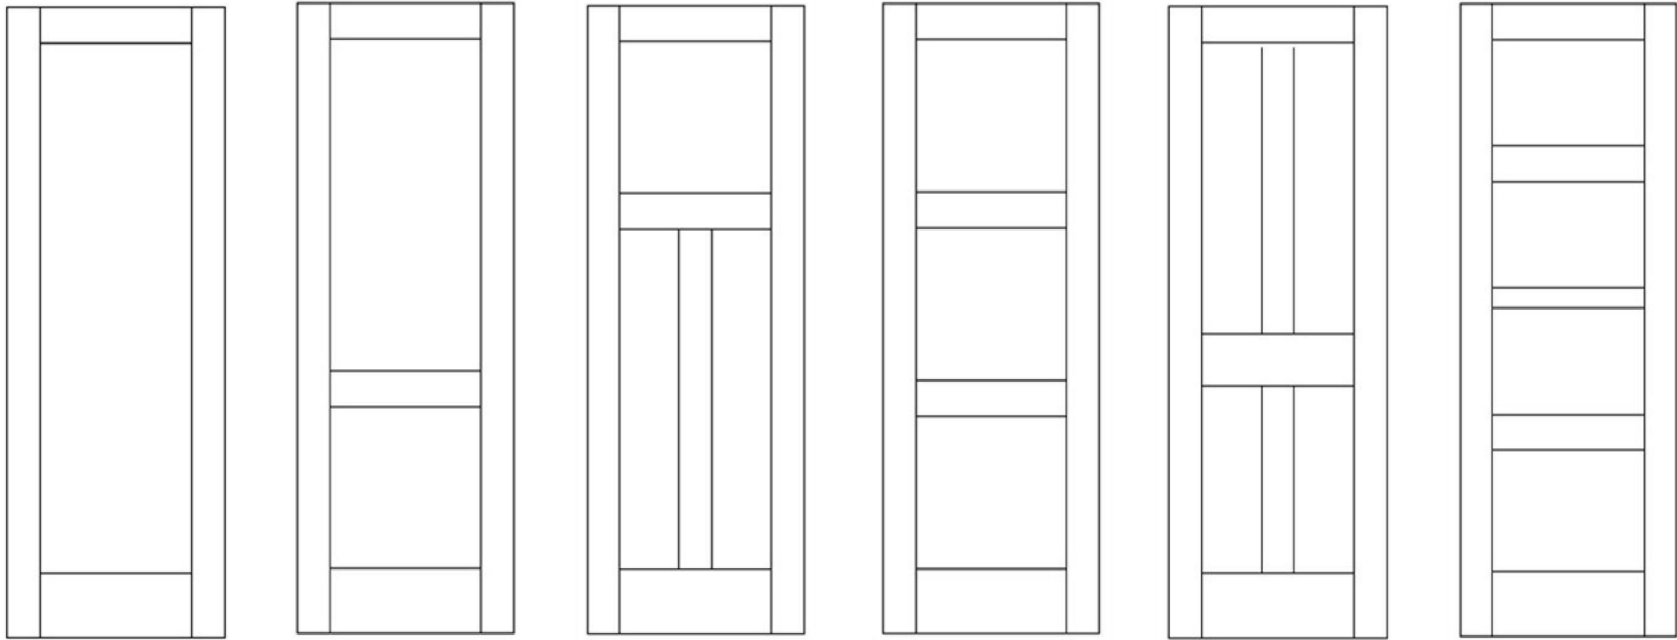

VF1000

VF2000

VF3000

VF3001


VF4000

VF4001


Application: Interior
Thickness:1-1/8"; 1-3/8"; 1-3/4";
Width:2/0,2/2,2/4,2/6,2/8,2/10,
Height:80"




Raised Panel Door

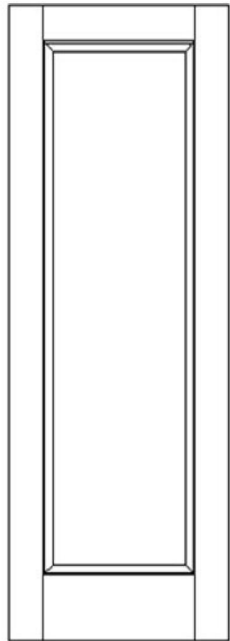


VR1000

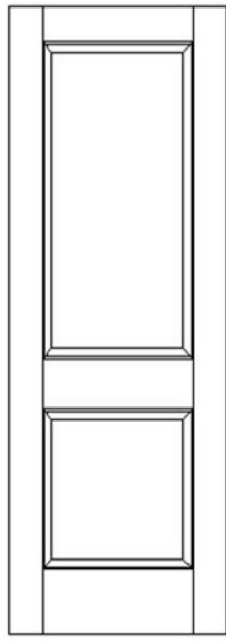


VR2000

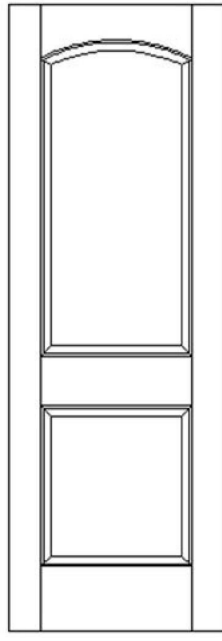


VR2100

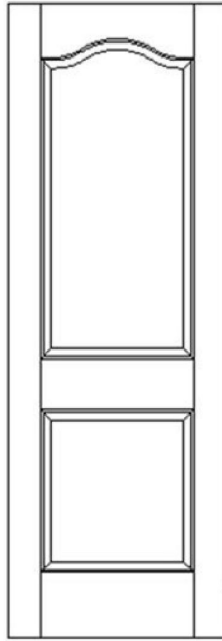

VR2200

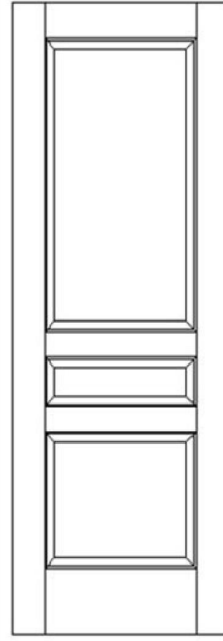

VR3000

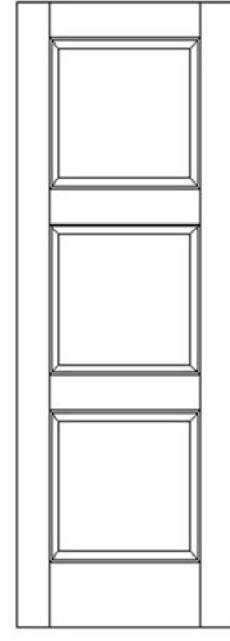

VR3001

Application: Interior

Thickness: 1-1/8"; 1-3/8"; 1-3/4";

Width: 2/0, 2/2, 2/4, 2/6, 2/8, 2/10,

Height: 80"



Walnut



Pine



Maple



White Oak



Red Oak



Cherry



Hemlock



Okoume




Sapele




alder-knotty


Raised Panel Door

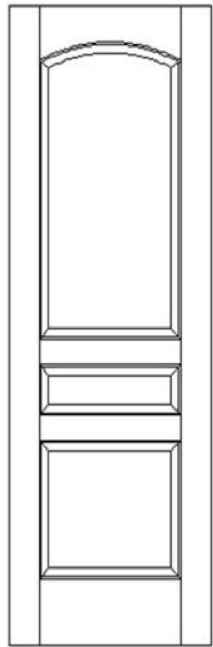


VR3100

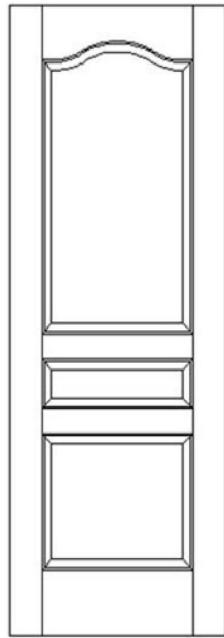


VR3200

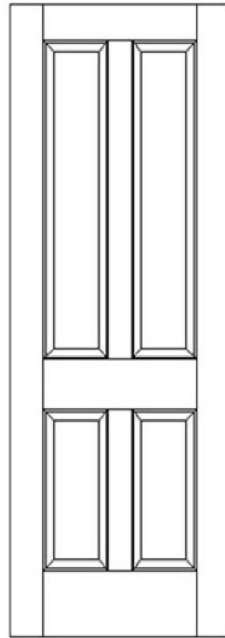


VR4000

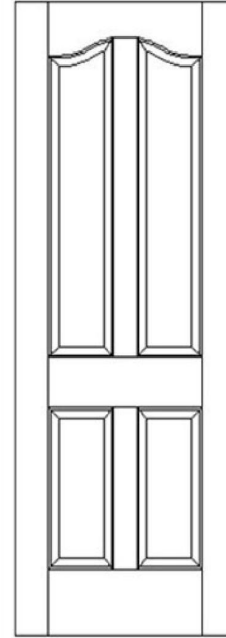

VR4200

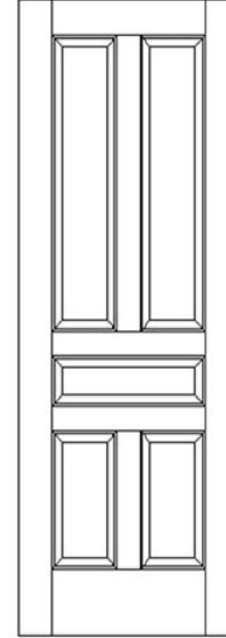

VR5000

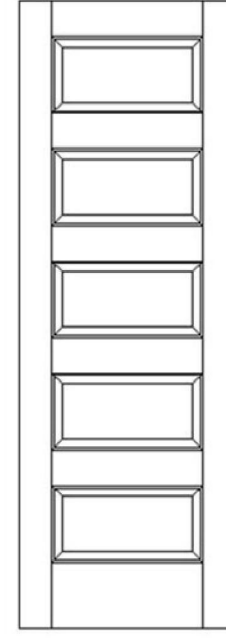

VR5001

Application: Interior

Thickness: 1-1/8"; 1-3/8"; 1-3/4";

Width: 2/0, 2/2, 2/4, 2/6, 2/8, 2/10,

Height: 80"



Walnut



Pine



Maple



White Oak



Red Oak



Cherry



Hemlock



Okoume




Sapele




alder-knotty

Raised Panel Door


CAD Draft

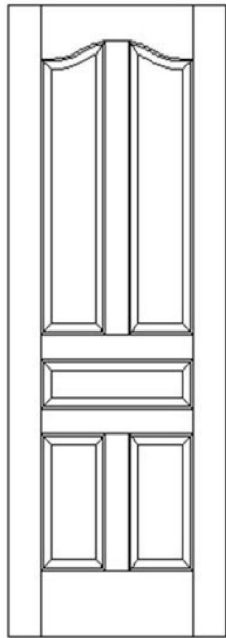


VR5200

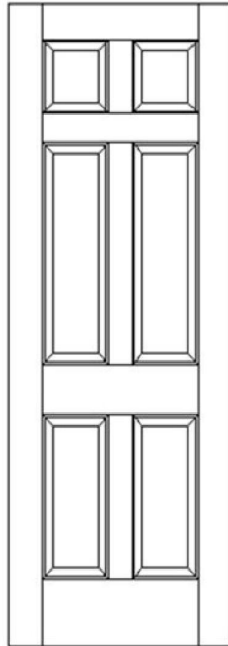

VR6000

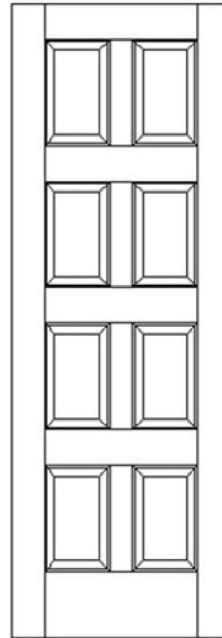

VR8000

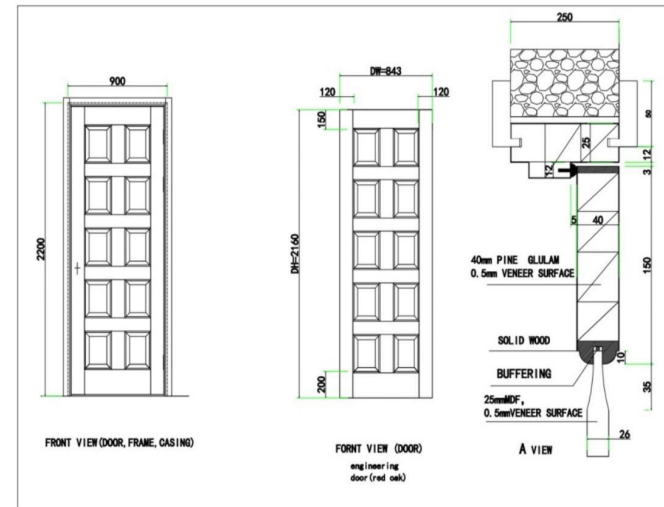

Application: Interior

Thickness: 1-1/8"; 1-3/8"; 1-3/4";

Width: 2/0, 2/2, 2/4, 2/6, 2/8, 2/10,

Height: 80"



Walnut



Pine



Maple



White Oak



Red Oak



Cherry



Hemlock



Okoume




Sapele




alder-knotty


Louver Door

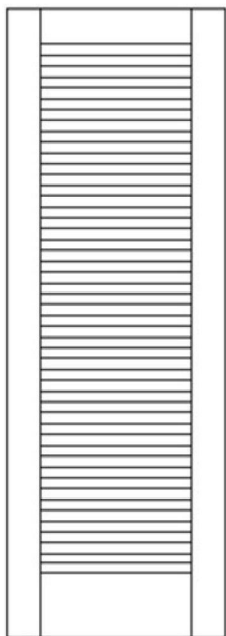


VLV1000

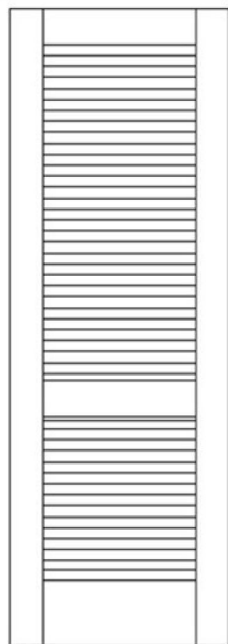


VLV2000

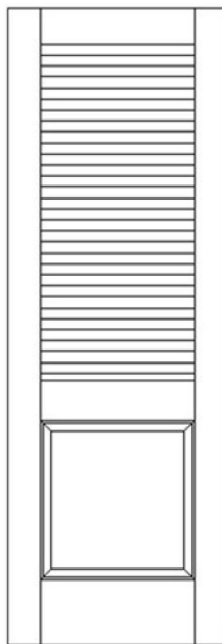

VLV2001

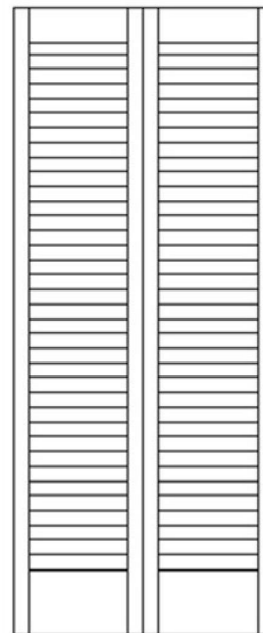

VLVB1000

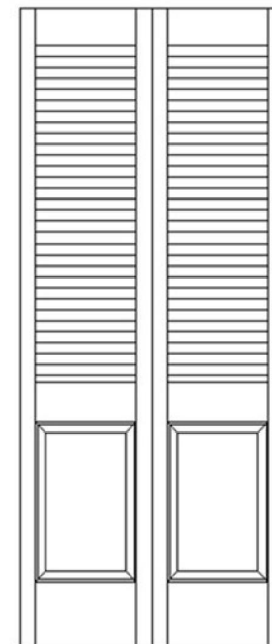

VLVB2001

Application: Interior


Thickness: 1-1/8"; 1-3/8"; 1-3/4";

Width: 2/0, 2/2, 2/4, 2/6, 2/8, 2/10,

Height: 80"

Hardware

Hinge



Black

Material: Stainless Steel



Green

Surface: Satin



Red

Max Weight Capacity: 60kg/3pcs



Chrome



Stainless



Gold

Lock



Material: Zinc Alloy

Surface: Nickel plated/Satin

Available door thickness: 35~50mm

Stopper



Material: Zinc Alloy

Surface: satin nickel

Installation way: vertical/horizontal

More items available.


Structure of slab



Case Photo



Raised Panel Door

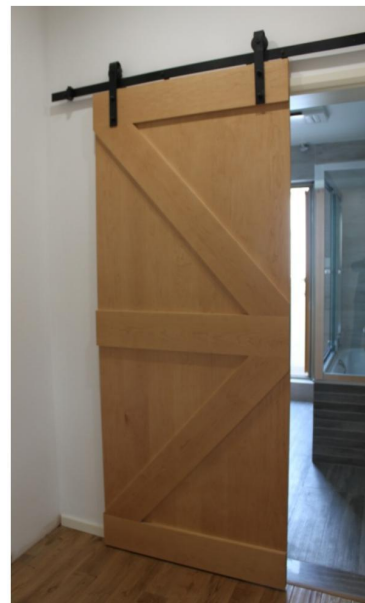

Barn Door

Warranty

How Long The Warranty Lasts and What JIANGYANG Wood Products Will Do.

Should the Product fail to conform to this warranty within a one (1) year period of the original owner from the date of purchase of the Product, JIANGYANG Wood Products will, at its option, (a) repair the Product, (b) replace the Product in the same stage of fitting or finishing as was initially supplied by JIANGYANG Wood Products, or (c) refund the price originally paid to JIANGYANG Wood Products for the Product. If the claimed nonconformity is warp, JIANGYANG Wood Products may defer repairing or replacing the Product for a period of up to twelve (12) months from the date of claim or the date of installation, as it is not uncommon for a temporary warp condition to occur as the door adjusts to local weather conditions. This deferral will not be counted against the warranty period. This warranty is non-transferable.

What JIANGYANG Wood Products Will Not Do.

JIANGYANG Wood Products is not responsible for transportation, shipping, removal, finishing, labor or installation charges or costs incurred in replacing the Product or any other costs relating to the replacement of the Product.

Product Care.

All Products are to be stored on flat level surfaces in well ventilated areas. Products are to be kept covered until finished to avoid discoloration from dirt or light. Be sure to apply a sufficient amount of exterior finish by the finish manufacturer's instructions to all six (6) sides and any other exposed edges within 1 week of JIANGYANG Wood Products delivery date. The Products should not be exposed to extreme conditions before finish has been applied, the relative humidity should not be less than 25% or greater than 55%. The Products should be hung using three (3) hinges up to seven-foot-six (7'6") and four (4) hinges for doors up to ten-foot (10').